
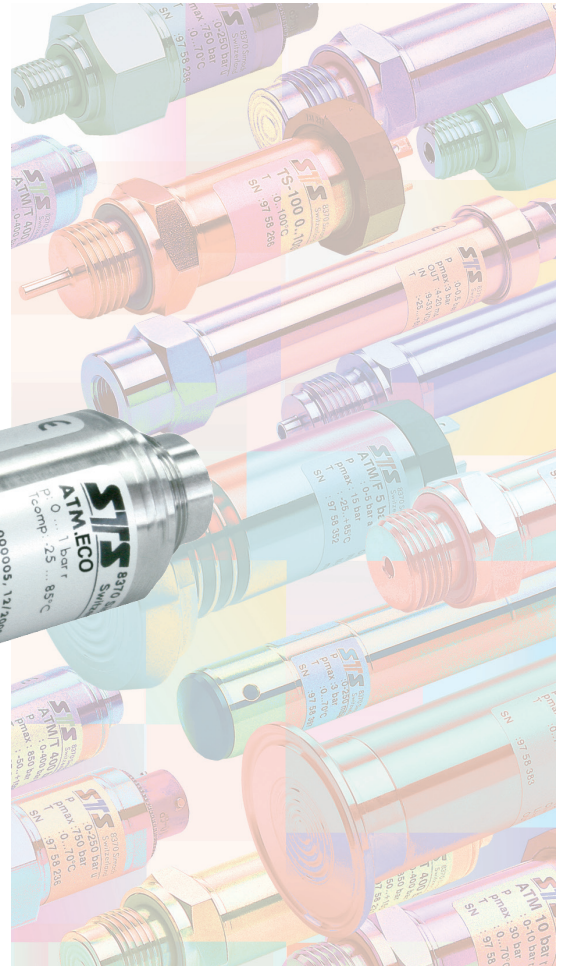


PRESSURE TRANSMITTER

ATM.ECO
ATM.ECO/Ex

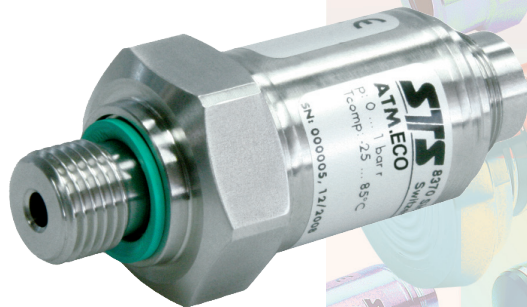

II 1G Ex ia IIB/IIC T3...T6
II 1D Ex iaD 20 IP6x T145...T70°C

Features





- Compact and robust stainless steel assembly 1.4435 or titanium
- Piezoresistive measuring element
- Measuring ranges from 0...100mbar to 0...1000bar
- Calibration available for all common pressure units
- Reverse polarity and short circuit protected
- High EMV stability
- Customized versions due to modular assembly

Typical applications

- Machine installations
- Environmental monitoring
- Food industry
- Mobile hydraulics
- Test and calibration systems

Specifications ATM.ECO and ATM.ECO/Ex

Pressure range	[bar]	0.1 ... 0.5	> 0.5 ... 2	> 2 ... 100	> 100 ... 600	> 600 ... 1000
Overpressure		3 bar	3 x FS (min. 3 bar)	3 x FS (max. 850 bar, optional 1500 bar)	3 x FS (max. 850 bar, optional 1500 bar)	1500 bar
Burst pressure	[bar]	≥ 200	≥ 200	≥ 850	≥ 850	≥ 1500
Total Error Band ¹⁾	[± % FS]					
ATM.ECO	(typ./max.) 0...70°C (typ./max.) -25...100°C	1.0/1.5 2.0/2.5	0.7/1.0 1.0/1.5	0.7/1.0 1.0/1.5	0.7/1.0 1.0/1.5	0.7/1.0 1.0/1.5
Accuracy ²⁾	[± %FS]	≤ 0.25 (optional ≤0.1)	≤ 0.25 (optional ≤0.1)	≤ 0.25 (optional ≤0.1)	≤ 0.25 (optional ≤0.1)	≤ 0.25
Medium temperature		-40...150°C				
Ambient temperature		-40...125°C				
Storage temperature		-40...125°C				
Response time		< 1 ms / 10...90 %FS				
Long term stability (typ./max.)		<0.5%FS/<4mbar	<0.2%FS/<4mbar	<0.1%FS/<0.2%FS	<0.1%FS/<0.2%FS	<0.1%FS/<0.2%FS

Electrical output					
Type ATM.ECO	4...20mA	Type ATM.ECO/Ex	4...20mA	Type ATM.ECO	0...5V/0...10V
Supply voltage	9...33 VDC	Supply voltage	9...30 VDC	Supply voltage	12...30 VDC
Supply voltage influence	< 0.05 %FS	Supply voltage influence	< 0.05 %FS	Supply voltage influence	< 0.05 %FS
Circuit diagram (example)		Circuit diagram (example)		Circuit diagram (example)	
 Load resistance influence < 0.05 %FS					

Ex-Approval gas / dust				
Approval	SEV 09 ATEX 0108	II 1G Ex ia IIB/IIC T3...T6 II 1D Ex iaD 20 IP6x T145...T70°C		
Standards		EN 60079-0 / EN 60079-11 (gas) EN 61241-0 / EN 61241-11 (dust)		
Temperature class		T6	T4	T3
Ambient temperature T _a	[°C]	-40...50	-40...85	-40...125
Process temperature	[°C]	-40...50	-40...110	-40...150

Without any information about temperature class the transmitter will be delivered for T4.
For detailed Ex-specifications see the assembly instruction manual.

Materials	
Process connection, diaphragm, housing	Stainless steel 1.4435 or titanium (option)
Seals	Viton (other materials see ordering information)

Qualification

Standard	Level	Typical interferences
Mechanical charges:		
EN 60068-2-6	Vibration	10g (4...2000 Hz, deflection ± 10 mmpp)
EN 60068-2-27	Shock	100g (impulse duration 6 ms)
Emission:		
EN 55022	Emission, class B	< 30 dBμV/m (0.03...1 GHz)
Immunity:		
EN 61000-4-2	Generic immunity	8 kV contact, 15 kV air
EN 61000-4-3	Electrostatic discharge	10 V/m, 0.08...2.7 GHz, 80% AM 1 kHz, 3 s
EN 61000-4-4	Fast transients (burst)	4kV
EN 61000-4-5	Surge	Line-Line: 0.5 kV/42 Ω, Line-Earth: 1 kV/42 Ω
EN 61000-4-6	Conducted radio-frequency	10 V, 0.15...80 MHz, 80% AM 1kHz, 3s
		Cellular phones, radio sets Motors, valves Lightning strikes Cellular phones, radio sets

¹⁾ Total Error Band incl. accuracy, temperature influences, temperature error zero and span, hysteresis and repeatability by max. signal span (16mA)

²⁾ Zero based non-conformity according to DIN16086, including hysteresis and repeatability by ambient temperature



Ordering information

		ATM.ECO ATM.ECO/Ex	X	XXXX	XXXX	XX	XXX
Type	ATM.ECO						
	ATM.ECO/Ex						
Pressure type	Gauge		1				
	Absolute (vacuum)		2				
	Sealed gauge		3				
Pressure range	Any pressure ranges between 0...100mbar and 1000bar available			XX			
Pressure connection	G 1/4 I	(Fig. 1)			00		
	G 1/4 A	(Fig. 2)			11		
	G 1/2 A	(Fig. 3)			13		
	G 1/2 A, frontal diaphragm	(Fig. 4)			14		
	G 1/2 A, flush diaphragm	(Fig. 5)			15		
	1/4 NPT A	(Fig. 6)			10		
	1/2 NPT A	(Fig. 7)			19		
	Special connections available				XX		
Electrical connection	Connector DIN 43650 (screwed on) ¹⁾	(Fig. 8)	IP 65		01		
	Connector Binder 723, 5-pin ¹⁾	(Fig. 9)	IP 67		03		
	Connector Binder 723, 5-pin (screwed on) ¹⁾	(Fig. 10)	IP 67		43		
	Connector MIL C26482, (10-6) ¹⁾	(Fig. 11)	IP 40		06		
	PE cable ^{2) 4)}	(Fig. 12)	IP 67		13		
	PUR cable ^{2) 3)}	(Fig. 12)	IP 67		15		
	Teflon cable ²⁾	(Fig. 12)	IP 67		21		
	PUR cable, blue ^{2) 3) 5)}	(Fig. 12)	IP 67		17		
	Teflon cable, blue ^{2) 5)}	(Fig. 12)	IP 67		22		
	Special connections available				XX		
Output signal	4...20 mA				05		
	0...5V (no Ex version)				46		
	0...10V (no Ex version)				47		
Accuracy	≤ ± 0.25% FS				1		
	≤ ± 0.1% FS (≤ 600bar FS)				2		
Temperature range ⁶⁾	0...70°C compensated (allowed medium temperature -40...125°C)				0		
	-25...100°C compensated (allowed medium temperature -40...125°C)				1		
	-25...100°C compensated (allowed medium temperature -40...150°C)				2		
	-40...100°C compensated (allowed medium temperature -40...125°C)				3		
Temperature class ⁷⁾ (Ex version)	T6 (Ta: -40...50°C) 0...70°C compensated (allowed medium temperature -40...50°C)				0		
	T4 (Ta: -40...85°C) -25...100°C compensated (allowed medium temperature -40...110°C)				1		
	T3 (Ta: -40...125°C) -25...100°C compensated (allowed medium temperature -40...150°C)				2		
	T3 (Ta: -40...125°C) -40...100°C compensated (allowed medium temperature -40...125°C)				6		
Options	Throttle ⁸⁾						A
	Special oil filling in the TD: ASEOL Food						G
	Halocarbon (for oxygen applications) ⁹⁾						H
	Seals: Viton (standard)						U
	EPDM						S
	Kalrez						T
Version titanium							K

¹⁾ Cable socket connector not included

²⁾ Please specify the required cable length

³⁾ For medium temperature > 50°C a PE or teflon cable must be used

⁴⁾ Food approved

⁵⁾ Cable types for ATM.ECO/Ex

⁶⁾ Temperature range for ATM.ECO

⁷⁾ Temperature class for ATM.ECO/Ex

⁸⁾ Only with pressure connection Fig. 2 and Fig. 3

⁹⁾ Max. pressure range ... 120 bar (burst pressure > 175 bar)

Pressure connections

Fig. 1




Fig. 2




Fig. 3




Fig. 4




Fig. 5




Fig. 6






Fig. 7




Dimensions

Version for medium temperature up to 125°C



L = 25 mm for connector DIN 43650


Version for medium temperature >125°C up to 150°C



L = 52 mm for connector DIN 43650


Electrical Connections

Fig. 8



Pin	2-wire	3-wire
1	+Vin	+Vin
2	Pout	Pout
3	PROG2	GND
E	PROG1	PROG1
E	EP (only Ex)	


Fig. 9



Cable socket connector




Fig. 10



Pin	2-wire	3-wire
1	Pout	Pout
2	PROG1	PROG1
3	+Vin	+Vin
4	PROG2	GND
5	EP (only Ex)	

Fig. 11




Cable socket connector



Pin	2-wire	3-wire
A	+Vin	+Vin
B	PROG2	GND
C	Pout	Pout
D	PROG1	PROG1
E	EP (only Ex)	

Fig. 12



Colour	2-wire	3-wire
white	+Vin	+Vin
yellow	Pout	GND
brown		Pout
grey	EP (only Ex)	

Specifications may change without notice.

10.00.0307.A

09/2009

Switzerland

STS Sensor Technik Sirmach AG
Rüthhofstrasse 8
CH - 8370 Sirmach
Tel.: +41 (0)71 969 49 29
Fax: +41 (0)71 969 49 20
e-mail: sales@sts-ag.ch
Internet: www.sts-ag.com

Germany

STS Sensoren Transmitter
Systeme GmbH
Poststrasse 7
D - 71063 Sindelfingen
Tel.: +49 (0)7031 204 9410
Fax: +49 (0)7031 204 9420
e-mail: info@sts-ag.de
Internet: www.sts-ag.com

Italy

STS Italia s.r.l.
Via Gesù 5
I - 20090 Opera (MI)
Tel.: +39 02 57607073/074
Fax: +39 02 57607110
e-mail: info@sts-italia.it
Internet: www.sts-ag.com

France

STS France
844, Route de la Caille
FR - 74350 Allonzier la Caille
Tel.: +33 (0)4 50 08 48 15
Fax: +33 (0)4 50 67 02 43
e-mail: info@stsfrance.fr
Internet: www.sts-ag.com

Great Britain

STS Great Britain Ltd.
Coppice House
Halesfield 7
GB - Telford TF7 4NA
Tel.: +44 (0) 1952 581093
Fax: +44 (0) 1952 581046
e-mail: contact@sts-gb.co.uk
Internet: www.sts-ag.com

represented by